



Specification

Component	Description
Dimension	650mm(D) x 437.5mm(W) x 44mm(H)
Material	1.0mm SGCC Zinc-Coated Steel
HDD Bay	10 x 2.5" hot-swap SATA/SAS drive bays, built-in 1x2.5" drive bay
CD-ROM Bay	None
Cooling Fan	6pcs 40mm fan position, standard chassis with 4pcs 4056 fans
HDD Tray	Anti-EMI design, compatible with 2.5"/3.5" HDD
HDD Backplane	6Gb/s backplane(Optional 12Gb/s), compatible with SATA/SAS HDD, with temperature control, SGPIO, Hard disk time sharing start
Suitable M/B	MAX support to 13.68" x 13"(EE-ATX) motherboard
System Control	Power LED, Reset, Power SW, HDD LED, 2xNIC LED, UID LED, UID SW, Fan Fail LED, PWR Fail LED, 2xUSB3.0
Suitable PSU	1U standard power supply and redundant power supply
Applications	Cloud storage, IPFS, Security monitoring, etc





①. Switch Components

②. 2.5" HDD Tray

③. USB3.0 port

④. Top Cover Fastening Button

Model Dimensions

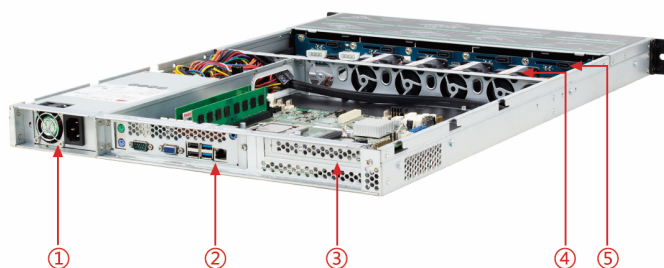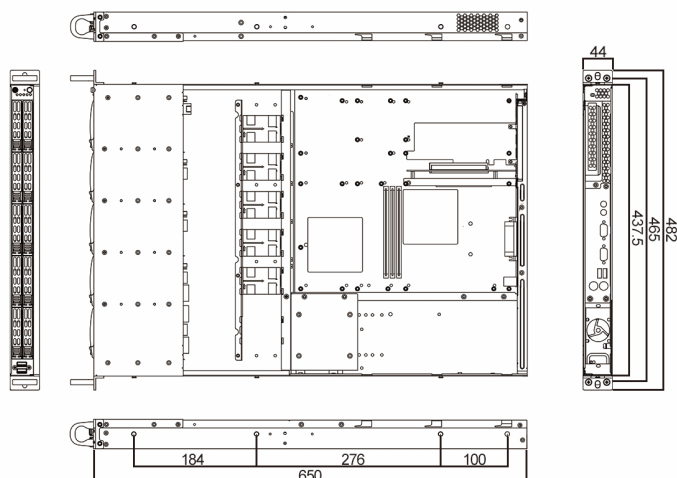

①. 1U Power Supply


②. Motherboard

③. Horizontal PCI/PCIE Expansion Slot

④. Fan Module

⑤. HDD Backplane


Detail Description



SATA Port (optional SFF8087 port)

D-type 4Pin power interface

Note: Optional 12Gb/s(SFF8643) backplane

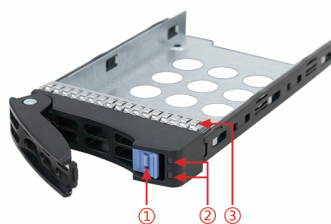

①. Lock catch ②. HDD LED ③. Anti-EMI design



3-fold ball bearing slide rail